(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



I LE BUS EN REIN EN EL EN REIN ER EN E

(43) International Publication Date 24 July 2003 (24.07.2003)

PCT

(10) International Publication Number WO 2003/060703 A3

(51) International Patent Classification7:

G06F 17/30

(21) International Application Number:

PCT/PL2003/000005

(22) International Filing Date: 16 January 2003 (16.01.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

P-351784

21 January 2002 (21.01.2002)

- (71) Applicants (for all designated States except US): AD-VANCED DIGITAL BROADCAST POLSKA SP. Trasa Pólnocna 16, PL-65-119 **Z.O.O.** [PL/PL]; ul. Zielona Góra (PL). ADVANCED DIGITAL BROAD-CAST LTD. [CN/CN]; 8/F, 145 Chung Shan North Road, Section 2, Taipei 104 (TW).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SZAJDECKI, Andrzej [PL/PL]; ul. Wegierska 3/30, PL-65-000 Zielona Góra (PL). BINISZKIEWICZ, Adam [PL/PL]; ul. Jez & Zacute; dziecka 9, PL-65-544 Zielona Góra (PL).


- (74) Agent: HUDY, Ludwik; Czernichów 4, PL-32-070 Czernichów, Kraków (PL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only
- of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: SYSTEM FOR STORING DATA AND METHOD FOR RECORDING DATA

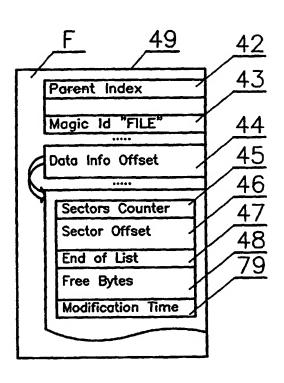

(57) Abstract: A system for storing data forming a single file (61) recorded as an undivided file or recorded in fragments (61) on a data area has a separate file (E) containing information related to the single file (61). Location of the separate file (E) recorded on the data area is not predefined. The separate file is a set of tables consisting of at least one table of records containing at least one record and/or a record (75) of records table (E) of table extension (EO) and/or records (96) table containing at least one record of single file fragments and records of records table of table extension and/or a set of records of single file fragments, and the number of tables of further table extensions is not limited.

WO 2003/060703 A3



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the international search report: 15 July 2004

(15) Information about Correction:
Previous Correction:

see PCT Gazette No. 23/2004 of 3 June 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

rnational Application No PCT/PL 03/0005

			PCT/PL 03	/00005
A. CLASSII IPC 7	FICATION OF SUBJECT MATTER G06F17/30			
According to	o International Patent Classification (IPC) or to both national classifica	ution and IPC		
B. FIELDS	SEARCHED			
Minimum do IPC 7	cumentation searched (classification system followed by classification $G06F$	on symbols)		
	tion searched other than minimum documentation to the extent that so			
Electronic d	ata base consulted during the international search (name of data bas	se and, where practica	l, search terms used	3)
WPI Da	ta, EPO-Internal, INSPEC			
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT			
Category °	Citation of document, with indication, where appropriate, of the rela	evant passages		Relevant to claim No.
X	US 5 960 446 A (YEHUDAI ZVI YOSEF 28 September 1999 (1999-09-28) column 3, line 25 -column 5, line column 5, line 22 -column 8, line	1-18		
X	US 6 032 161 A (FULLER BILLY J) 29 February 2000 (2000-02-29) column 1, line 50 -column 5, line	1-18		
	·			
Furt	ther documents are listed in the continuation of box C.	χ Patent family	members are listed	in annex.
'A' docume consider filling of the color of	ent defining the general state of the art which is not dered to be of particular relevance document but published on or after the international date ent which may throw doubts on priority claim(s) or is cited to establish the publication date of another on or other special reason (as specified) sent referring to an oral disclosure, use, exhibition or means ent published prior to the international filling date but than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive slep when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the	actual completion of the International search	Date of mailing of	the international se	arch report
	26 April 2004	07/05/		
Name and	mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx31 651 epo nl,	Authorized officer		
i	Fax: (+31-70) 340-3016	, wairy,	-	



INTERNATIONAL SEARCH REPORT

Information on patent family members

rnational Application No					
PCT/PL	03/00005				

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5960446	Α	28-09-1999	NONE		
US 6032161	A	29-02-2000	US DE DE EP JP	6002866 A 69600754 D1 69600754 T2 0760500 A1 9114710 A	14-12-1999 12-11-1998 06-05-1999 05-03-1997 02-05-1997

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau

ZIPO OMPI

1 TERLE BURNING HEREN GEREN ER HER BURN BURN BURN BER HER BURN BER HER GEREN BURN BER HER BER HERE BURN BER HE

(43) International Publication Date 24 July 2003 (24.07.2003)

PCT

(10) International Publication Number WO 03/060703 A2

(51) International Patent Classification7:

- (21) International Application Number:
- PCT/PL03/00005

G06F 9/40

- (22) International Filing Date: 16 January 2003 (16.01.2003)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

P-351784


21 January 2002 (21.01.2002) P

(71) Applicants (for all designated States except US): AD-VANCED DIGITAL BROADCAST POLSKA SP. Z.O.O. [PL/PL]; ul. Trasa Pólnocna 16, PL-65-119 Zielona Góra (PL). ADVANCED DIGITAL BROAD-CAST LTD. [CN/CN]; 8/F, 145 Chung Shan North Road, Section 2, Taipei 104 (TW).

- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SZAJDECKI, Andrzej [PL/PL]; ul. Wegierska 3/30, PL-65-000 Zielona Góra (PL). BINISZKIEWICZ, Adam [PL/PL]; ul. Jezdiecka 9, PL-65-544 Zielona Góra (PL).
- (74) Agent: HUDY, Ludwik; Czernichów 4, PL-32-070 Czernichów, Kraków (PL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: SYSTEM FOR STORING DATA AND METHOD FOR RECORDING DATA

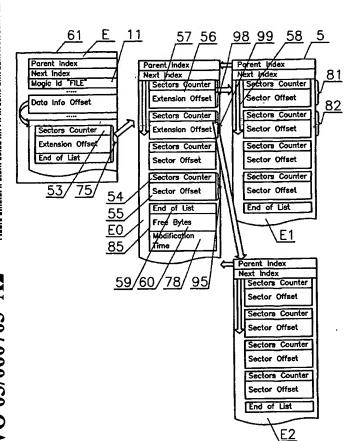

(57) Abstract: A system for storing data forming a single file (61) recorded as an undivided file or recorded in fragments (61) on a data area has a separate file (E) containing information related to the single file (61). Location of the separate file (E) recorded on the data area is not predefined. The separate file is a set of tables consisting of at least one table of records containing at least one record and/or a record (75) of records table (E) of table extension (EO) and/or records (96) table containing at least one record of single file fragments and records of records table of table extension and/or a set of records of single file fragments, and the number of tables of further table extensions is not limited.

WO 03/060703 A2



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only
- of inventorship (Rule 4.17(iv)) for US only

Published:

 without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM FOR STORING DATA AND METHOD FOR RECORDING DATA

TECHNICAL FIELD

The invention relates to a system for storing data and a method for recording data.

BACKGROUND ART

Besides common file systems such as FAT (File Allocation Table), NTFS (New Technology File System), BFS (BeOS File System) and UFS (UNIX File System), and their variants, a file sharing system, running on different computers connected with each other in a network, where each computer has its individual operating system, and can access files stored on disks connected to the network, is known from the US Patent No. 5,960,446.

In the US Patent No. 6,303,183 a file management system capable of managing vacant blocks so that it is possible to optimize unoccupied areas in mass memory, is registred.

Information stored on disks with all such file systems, because of the universality of these systems, can be read by any personal computer with a proper file system, and, additionally, is handled efficiently when medium-sized files are used.

DISCLOSURE OF INVENTION

According to the present invention, in a system for storing information of a single file recorded as an undivided file or recorded in fragments, information about the single file is recorded in a separate file, whose location of recording is not predefined.

Preferably the separate file is a set of tables consisting of at least one table of records containing at least one record and/or a record of records table of table extension and/or records table containing at least one record of single file fragments and records of records table of table extension and/or a set of

2

records of single file fragments, and the number of tables of further table extensions is not limited.

The separate file, called an allocation chain, consists of at least one table of records and its/theirs tables of extension, and information about extension table of records table or its/theirs further tables of extension is stored in the record of table or the record of table extensions, whose extensions are its further extensions.

The allocation chain created from tables of records of its own extensions and/or records of table extensions and records of fragments of the single file and/or records of fragments of the single file, is organized into a branched tree, called a binary tree, which at ends of branches carries information about the termination of branches, and at its own end has information of its own termination.

Information characterizing a single file or its part is recorded in many separate files.

Information characterizing the single file stored in fragments is recorded in a separate file consisting of at least one record that may be stored in any place.

A record forming a part of the separate file consists of records with information describing fragments of the single file and/or at least one record containing information of at least its one own extension.

A record and/or a record extension, forming a part of the separate file, consists of records with information characterizing fragments of the single file and/or at least one record with information about its further extensions.

The separate file with information describing the single file and consisting of at least one record contains at least information about a number of logically separated smallest areas reserved in one continuous block of logically separated smallest areas and about the address of the first logically separated smallest area at a continuous block of logically separated smallest areas. This information is binary compressed and contains values with a sign; a negative value representing the amount of logically separated smallest areas means that a record has its own extension with a numerically expressed

quantity of logically separated smallest areas. Information about its termination and/or about the number of free bytes and the time of modification can be given at the end of the separate file.

Information consisting of records and describing fragments of the file is grouped, and information about it is stored in the separate file consisting of at least one record.

The further object of this invention is that in a method of data recording of a single file, recorded as an undivided file or recorded in fragments, information about the single file is stored in a separate file, whose place of recording is not predefined.

The separate file can comprise at least one table of records containing at least one record and/or a record of records table of table extension and/or a table of records containing at least one record of single file fragments and records of records tables of tables extensions and/or a set of records of single file fragments, and there is no limit to the potential number of tables of further extensions.

The separate file is arranged as an allocation chain created by tables of records of its own extensions and/or records of tables extensions and records of single file fragments and/or records of single file fragments, formed as a branched tree, called a binary tree where information about the termination of a branch is placed at an end of a branch and information about the termination of a chain is placed at an end of a tree.

BRIEF DESCRIPTION OF DRAWINGS

The object of this invention is shown in implementation examples on the enclosed drawings, where fig. 1 shows a table of records of a single data set that is a file without extension, fig. 2 shows binary packing, fig. 3 shows a rule of allocation chain creation, fig. 4A and 4B show an example of an allocation chain, which, regarding the lack of space on one sheet, has been divided into parts A and B; and fig. 5 shows a fragment of a memory of a device for data storage with two files recorded.

4

BEST MODE FOR CARRYING OUT THE INVENTION

The invention will be described in detail with reference to the system of data storage on a hard disk. However, the presented solution can be applied to other devices for data storage as well.

Data recorded in such data storage devices, for example on a hard disk, have their own definite place and information regarding areas occupied by data sets of data are recorded in records table of variable size, which, as presented here, has been termed a chain of allocations. Each record that constitutes a data set is assigned to a single allocation unit, which can be a fragment of a file or a file, and which is represented by at least two parameters, namely a sector counter and a start sector for a given allocation represented by a Logical Block Address.

Fig. 1 shows the table <u>F</u> of records describing a data set or a set of information <u>49</u> called a file, recorded in one sector which is a logically separated smallest area <u>1</u> of the hard disk. The table <u>F</u>, in this case identical with the record <u>F</u>, gives the directory index <u>42</u> in which the file <u>49</u> is listed, along with the unique tag Magic Id File <u>43</u> used for verification whether the sector being read contains information about the file, the data information offset <u>44</u> concerning the place within the sector from which the information about the allocation chain begins from, the number <u>45</u> of sectors occupied by the file <u>49</u>, so-called sectors counter, a sector offset being a logical address <u>46</u> of a start sector, information <u>47</u> about the end of the list, the number <u>48</u> of free bytes and, most often given at the end of the record, the time of modification <u>79</u>.

In order to reduce the occupied space, the data concerning the allocation unit are binary packed. This method of compression is effective for small numerical values; therefore the start sector is coded as a difference between the last allocated address and the currently described one. The method of coding is presented in fig. 2, and for the presented solution the numerical values are numbers with a sign. The size of the numerical values is signaled by the tag 31, 32, 33, 34, 35, 36, 37, 38, 39, 40 describing the most significant bits.

If the most significant bit, namely the tag $\underline{31}$, $\underline{32}$ is equal to "0", it means that on the following seven bits a value from the range 0 ... 127 or ± 63 , depending on the bit specifying the sign, is recorded. This number is packed into one byte.

If the three most significant bits i.e. the tag <u>33</u>, <u>34</u> have the value of "100", it means that the value recorded on the following thirteen bits is a value from the range 128 ... 8K or a number from the range 64 ... 4K or - 4K ... -63, depending on the bit qualifying the sign. This number is packed in two bytes.

If the three most significant bits, i.e. the tag <u>35</u>, <u>36</u> have the value of "101", it means that the value recorded on the following twenty-one bits is a value from the range 8K to 2M or a number in the range 8K ... 1M or -1M ... - 8K, depending on the bit determining the sign. This number is packed in three bytes.

If the three most significant bits i.e. the tag <u>37</u>, <u>38</u> take the value of "110", it means that the value recorded on the following twenty nine bits is a value from the range 2M ... 0.5G or a number from the range 2M ... 256M or - 256M ... -2M, depending on the bit determining the sign. This number is packed in four bytes.

In the case where a disk is larger than 128 GB and the sector address has to be addressed by a number of a size larger than 28 bits 39, 40, the three most significant bits, i.e. the tag, are fixed to "111", and the bit describing the sign is followed by four bits, which determine the number of bytes.

The first numerical values <u>31</u>, <u>33</u>, <u>35</u>, <u>37</u>, <u>39</u> describe the number of sectors occupied by a file or a file-fragment, and the second numerical values <u>32</u>, <u>34</u>, <u>36</u>, <u>38</u>, <u>40</u> describe the offset to the recently allocated fragment of a file which is thus a separate unit of allocation. The digit <u>11</u>, <u>12</u>, placed after the tag <u>37</u>, <u>38</u>, determines a positive or negative numerical value. In the presented solution, digit "0" means a positive value and digit "1" means a negative value while compressing.

Figs. 3, 4A and 4B show tables <u>E</u>, <u>E0</u>, <u>E1</u> and <u>E2</u> of records creating the allocation-chain of file <u>61</u> which is divided into ten portions. Fig. 3 illustrates the rule of allocation-chain creation. In figs. 4A and 4B each record of a file section

gives at least the number of sectors occupied by a given item, and the numerical value describing the distance from the earlier allocated sections of the file. If the file is strongly fragmented, the number of records is huge, and searching for a proper sector, for example whilst moving within the file, could be very time-consuming. To obviate this problem, the field 53 of the record describing the sectors counter, denotes a number with a sign. The sign of the sector-number is specified by a digit "0" or "1" which is the first digit 52 following the tag 51. Digit "0" means a positive value, and digit "1" means a negative value. If the value 54 of the number of sectors is positive, then the field 55 of the start sector describes the distance from the earlier recorded fragment of a file, giving a binary packed number according to the rule presented in fig. 4. For example, the eighth section 62 of the file 61 contains a positive number of sectors, marked by "0" after the tag of the sectors counter, equal to 0x03 in the hexadecimal system, and "11" in the binary system, and the start address, equal to 0x7D, can be calculated as a sum of the address 0x78 of the last sector of the previous file-fragment and a value 0x05 of the start address/distance. For a negative value, indicated by digit "1" after the sectorcounter tag, the field 56 points to the address of a record extension of the file 61, and the field of sector counter 57 determines the number of sectors allocated by the extension of the file 61. The extensions of records and files are organized into binary trees to optimize the address-reading time of particular allocations while file-seeking. The zero value 59 of the field of the sectors counter is reserved to mark the end of the allocation chain and then the field 60, referring to the sector offset, provides information about the number of free bytes in allocated sectors and is used to calculate the file size. The first four fragments of the file 61 extension, beginning at the first sector 63, occupy subsequently 0x4F, 0x01, 0x02, 0x09 sectors which in total equals to 0x5B sectors and this number is set in the field 57 of extensions table E0 of records table E. The whole file 61 is written in 0x7C sectors, which is indicated by the field 53 of the first base-record of record-table E of the file 61. The number of bytes occupied by the file 61 is a difference between the number of bytes of sectors given in the base record in the field 53 and the number of free bytes

7

given at the end of the file in the field <u>60</u>. Assuming, that one sector occupies 512 bytes of memory and 0x12 bytes are free in the occupied sectors, for the number of 0x5C occupied sectors, a 63470 bytes-long file is received as a result.

Fig. 5 shows the memory section <u>71</u> of a device for information or data storage, which, in the reviewed example, is a hard disk having a sector as the logically separated smallest area <u>1</u> element. The data from record tables <u>E</u>, <u>E0</u>, <u>E1</u>, <u>E2</u> of the file <u>61</u> and its ten fragments, and the record <u>F</u> of the non-fragmented file <u>49</u> is written in section <u>71</u>. The single square of the memory section <u>71</u> represents a single sector of the hard disk. The positions of record tables <u>F</u>, <u>E</u>, <u>E0</u>, <u>E1</u>, <u>E2</u> together with the files <u>49</u> and <u>61</u>, as an example only, are random, but they correspond with information about the file <u>49</u>, <u>61</u> shown on figs. 4A and 4B.

The file $\underline{49}$ in the example adduced occupies only one sector $\underline{72}$ and its record \underline{F} is placed in the address 0xF0.

The first table E of records, containing the so-called base record of the file 61, is placed at address 0x80, the record-table E0 of the extension of records table E of the file 61, is placed at address 0x00, the table E1 of the first extension of records table E0 is placed at address 0x5F, and the records table E2 of the second extension of table E0 is placed at address 0xD5. The first record 81 of the file 61 starts from sector 0x10 and is marked with an arrow 80 which is followed by further arrows depicting the whole file. From the information presented in figs. 4A, 4B and the supplementary information in fig. 5, it emerges that the value 52 in the field 53 of the sectors counter is negative which means that the value in the field of the sector offset describes the length of the file extension. Taking into account that the first record 75 is placed at address 0x80 and taking into account the field of the start-address containing the value -0x80, one can calculate the position of records-table E0 as an extension of the records table \underline{E} , performing the calculation: 0x80 - 0x80 = 0x0. The first record 98 and the second record 99 of the table E0 written at the same address also have a negative value in the field of the sector-counter, which means that the field of the start-address distance describes the distance of the

8

next extension table E1 of the table E0 in relation to the base record of the table E0. That address can be calculated according to the formula 0x80 - 0x21 = 0x5F, and it describes the position of the first table E1 of the extension. The first record 81 and the second record 82 of the first table E1 of extension E0 have a positive sign in the field of the sector-counter, which means that it provides the number of continuous sectors allocated from the address given on the basis of the field of sector offset of the table E of records. That address, calculated on the basis of the value of the field representing the start-address distance, equals 0x80' - 0x70 = 0x10. The first record <u>81</u> of the table <u>E1</u> indicates that the first file-fragment 89 is written on 0x4F sectors starting from the address 0x10. The next record 82 in this extension specifies that the second fragment 90 of the file is stored on one sector beginning from the address 0x74 which has been calculated as the sum of address 0x5E of the last sector of the first fragment 89 and the value 0x16 given in the field of the sector offset of the second fragment 90. Each record describes the allocated areas on the hard disk in the way described above. The appearance of the sequence NaN 83, 84, binary 01000000, in the extension of the record denotes the end of the list of records. At the end of the allocation-chain the terminal record 85 appears with the sector counter 86 equal to 0, and the field 87 of the sector offset describes the amount of free bytes in the sector where the most recent data was allocated. This makes it possible to calculate the total space occupied by the data recorded on the disk.

After the last record <u>85</u> the time <u>78</u> of the last modification of the file is given, which enables instant information about the history of the processing of the file.

9

CLAIMS


- 1. A system for storing data forming a single file (49, 61) recorded as an undivided file (49) or recorded in fragments (61) on a data area and for controlling access to the data stored on the data area comprising a separate file (F, E) containing information related to the single file (49, 61) wherein the location of the separate file (F, E) recorded on the data area is not predefined.
- 2. The system for storing data, according to claim 1, characterized in that the separate file is a set of tables consisting of at least one table (<u>F</u>, <u>E</u>) of records containing at least one record (<u>F</u>) and/or a record (<u>75</u>) of records table (<u>E0</u>) of extension of table (<u>E</u>) and/or records table (<u>E0</u>) containing at least one record (<u>95</u>, <u>96</u>) of single file (<u>61</u>) fragments and records (<u>98</u>, <u>99</u>) of tables (<u>E1</u>, <u>E2</u>) of records of extension of table (<u>E0</u>) and/or a set of records (<u>81</u>, <u>82</u>) of single file (<u>61</u>) fragments, and the number of tables of further table extensions is not limited.
- 3. The system for storing data, according to claim 1, characterized in that the separate file is an allocation chain, which consists of at least one table of records and its/theirs tables of extension, and information about extension table ($\underline{E0}$) of records table (\underline{E}) or its/theirs further tables ($\underline{E1}$, $\underline{E2}$) of extension is stored in the record of table (\underline{E}) or the record of table ($\underline{E0}$) extensions, whose extensions are its further extensions ($\underline{E1}$, $\underline{E2}$).
- 4. The system for storing data, according to claim 3, characterized in that the allocation chain created from tables (\underline{E}) of records of its own extensions ($\underline{E0}$) and/or records ($\underline{98}$, $\underline{99}$) of table extensions ($\underline{E1}$, $\underline{E2}$) and records ($\underline{95}$, $\underline{96}$) of fragments of the single file ($\underline{61}$) and/or records ($\underline{81}$, $\underline{82}$) of fragments of the single file ($\underline{61}$), is organized into a branched tree, called a binary tree, which at ends of branches carries information about the termination of branches, and at its own end has information of its own termination.

- 5. The system for storing data, according to claim 1, characterized in that information characterizing the single file (61) or its part is recorded in many separate files.
- 6. The system for storing data, according to claim 1, characterized in that information characterizing a single file stored in fragments is recorded in a separate file consisting of at least one record stored in any place.
- 7. The system for storing data, according to claim 1, characterized in that a record forming a part of the separate file consists of records with information describing fragments of a single file and/or at least one record containing information of at least its one own extension.
- 8. The system for storing data, according to claim 1, characterized in that a record and/or a record extension, forming a part of the separate file, consists of records with information characterizing fragments of the single file and/or at least one record with information about its further extensions.
- 9. The system for storing data, according to claim 1, characterized in that the separate file with information describing the single file and consisting of at least one record contains at least information about a number of logically separated smallest areas (1) reserved in one continuous block of logically separated smallest areas (1) and about the address of the first logically separated smallest area (1) at a continuous block of logically separated smallest areas (1) wherein the information is binary compressed and contains values with a sign, and wherein a negative value representing the amount of logically separated smallest areas (1) means that a record has its own extension with a numerically expressed quantity of logically separated smallest areas (1), and wherein the information about its termination and/or about the number of free bytes and the time of modification is given at the end of the separate file.

- 10. The system for storing data, according to claim 1, characterized in that information consisting of records and describing fragments of the single file is grouped, and information about it is stored in the separate file consisting of at least one record.
- 11. A method for recording data of a single file, recorded as an undivided file or recorded in fragments on a data area and for controlling access to the data stored on the data area comprising the following step: storing a separate file containing information related to the single file (F, E) on the data area in a location (73, 75) not predefined
- 12. The method for recording data, according to claim 11, characterized in that the separate file comprises at least one table (\underline{E} , \underline{F}) of records containing at least one record (\underline{F}) and/or a record ($\underline{75}$) of records table ($\underline{E0}$) of extension of table (\underline{E}) and/or a table ($\underline{E0}$) of records containing at least one record ($\underline{95}$, $\underline{96}$) of single file ($\underline{61}$) fragments and records ($\underline{98}$, $\underline{99}$) of records tables ($\underline{E1}$, $\underline{E2}$) of extensions of table ($\underline{E0}$) and/or a set of records ($\underline{81}$, $\underline{82}$ of single file ($\underline{61}$) fragments wherein there is no limit to the potential number of tables of further extensions.
- 13. The method for recording data, according to claim 11, characterized in that the separate file is an allocation chain created by tables (<u>E</u>) of records of its own extensions (<u>E0</u>) and/or records (<u>98</u>, <u>99</u>) of tables extensions (<u>E1</u>, <u>E2</u>) and records (<u>95</u>, <u>96</u>) of single file (<u>61</u>) fragments and/or records (<u>81</u>, <u>82</u>) of single file (<u>61</u>) fragments, formed as a branched tree, called a binary tree wherein information about the termination of a branch is placed at an end of a branch and wherein information about the termination of the allocation chain is placed at an end of the branched tree.
- 14. The method for recording data, according to claim 11, characterized in that information characterizing the single file (61) or its part is recorded in many separate files.

- 15. The method for recording data, according to claim 11, characterized in that information characterizing a single file stored in fragments is recorded in a separate file consisting of at least one record stored in any place.
- 16. The system for storing data, according to claim 11, characterized in that a record forming a part of the separate file consists of records with information describing fragments of a single file and/or at least one record containing information of at least its one own extension.
- 17. The method for recording data, according to claim 11, characterized in that a record and/or a record extension, forming a part of the separate file, consists of records with information characterizing fragments of the single file and/or at least one record with information about its further extensions.
- 18. The method for recording data, according to claim 11, characterized in that the separate file with information describing the single file and consisting of at least one record contains at least information about a number of logically separated smallest areas reserved in one continuous block of logically separated smallest areas and about the address of the first logically separated smallest area at a continuous block of logically separated smallest areas wherein the information is binary compressed and contains values with a sign, and wherein a negative value representing the amount of logically separated smallest areas means that a record has its own extension with a numerically expressed quantity of logically separated smallest areas, and wherein the information about its termination and/or about the number of free bytes and the time of modification is given at the end of the separate data set.


PCT/PL03/00005 WO 03/060703

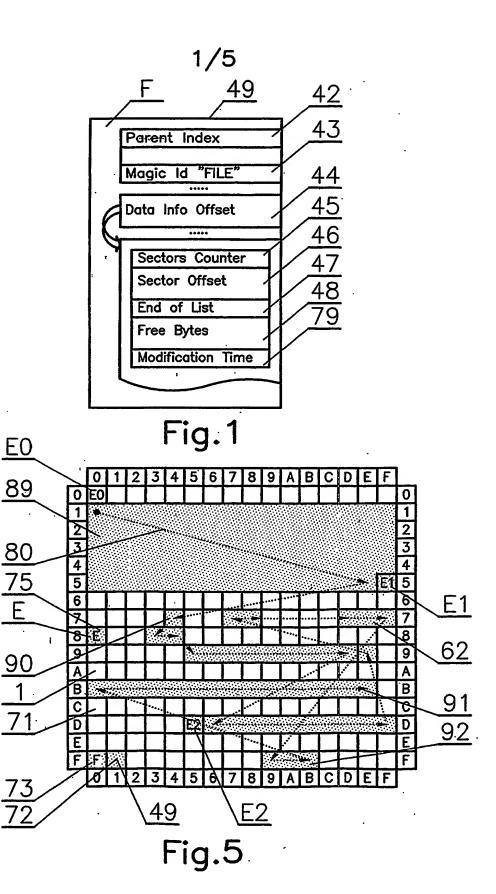

80

2/5							
One Byte 0127 ± 127 0x40 NaN	1 1 1 1 1 1	31					
Two Bytes 128<8K	0000000	<u>32</u> <u>33</u>					
+128<+4K -128>-4K	111111	<u>34</u>					
Three Bytes 8K<2M	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	<u>35</u> 36					
+8K<+1M -8K>-1M		<u>37</u>					
Four Bytes 2M<0.5G	3 6 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	<u>11</u> 38					
+2M<+256M -2M<-256M		<u>12</u> 39					
520 Bytes	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	40					
	Bytes x (B+3) 1 1 1 1 1 1 1 1	Fig.2					

PCT/PL03/00005

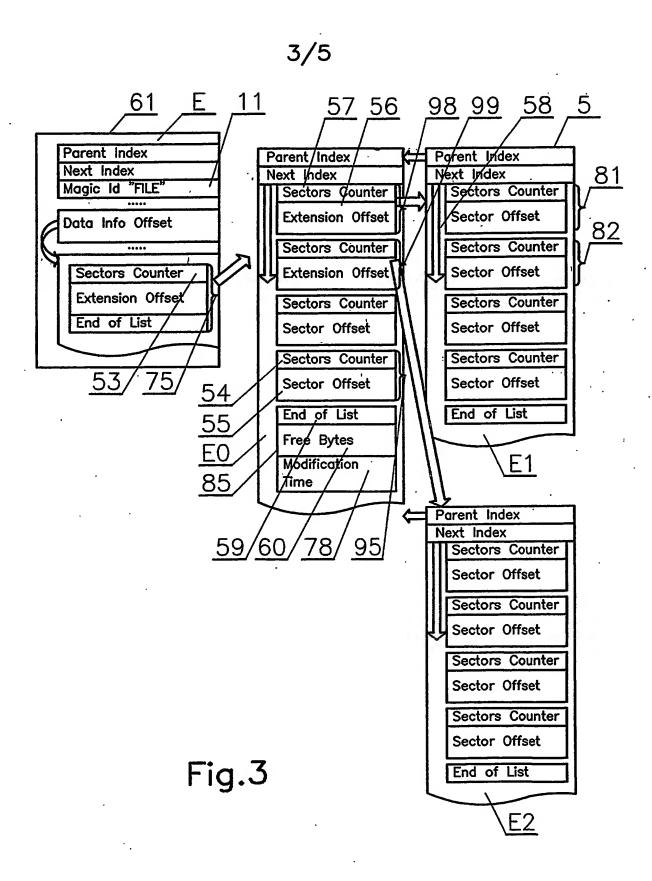

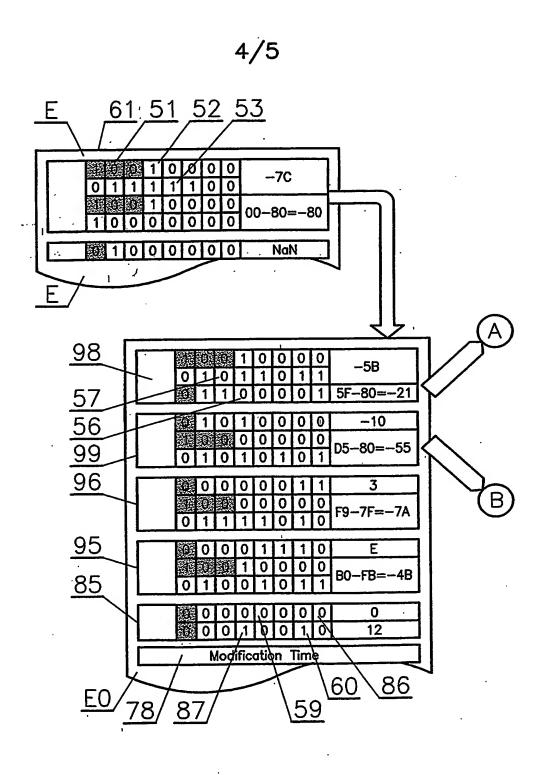


Fig.4A

5/5

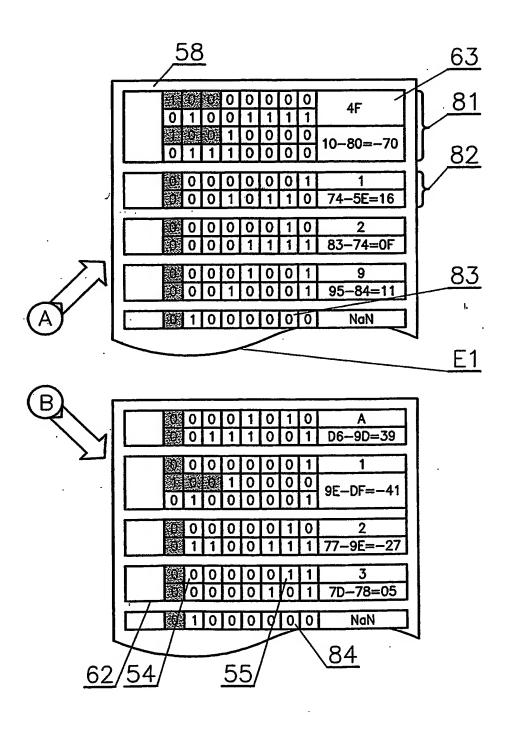


Fig.4B



CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau





(43) International Publication Date 24 July 2003 (24.07.2003)

PCT

(10) International Publication Number WO 2003/060703 A2

(51) International Patent Classification7:

G06F 9/40

(21) International Application Number:

PCT/PL2003/000005

- (22) International Filing Date: 16 January 2003 (16.01.2003)
- (25) Filing Language:

English

(26) Publication Language:


English

- (30) Priority Data: P-351784
- 21 January 2002 (21.01.2002) PL
- (71) Applicants (for all designated States except US): AD-VANCED DIGITAL BROADCAST POLSKA SP. Z.O.O. [PL/PL]; ul. Trasa Pólnocna 16, PL-65-119 Zielona Góra (PL). ADVANCED DIGITAL BROAD-CAST LTD. [CN/CN]; 8/F, 145 Chung Shan North Road, Section 2, Taipei 104 (TW).

- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SZAJDECKI, Andrzej [PL/PL]; ul. Wegierska 3/30, PL-65-000 Zielona Góra (PL). BINISZKIEWICZ, Adam [PL/PL]; ul. Jez & Zacute; dziecka 9, PL-65-544 Zielona Góra (PL).
- (74) Agent: HUDY, Ludwik; Czernichów 4, PL-32-070 Czernichów, Kraków (PL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: SYSTEM FOR STORING DATA AND METHOD FOR RECORDING DATA

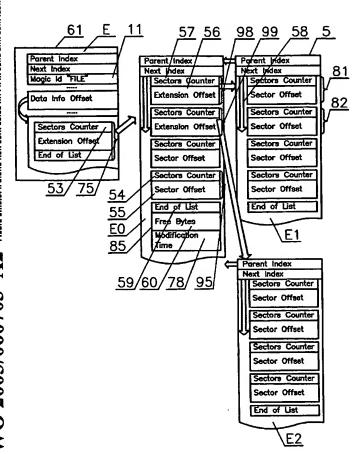

(57) Abstract: A system for storing data forming a single file (61) recorded as an undivided file or recorded in fragments (61) on a data area has a separate file (E) containing information related to the single file (61). Location of the separate file (E) recorded on the data area is not predefined. The separate file is a set of tables consisting of at least one table of records containing at least one record and/or a record (75) of records table (E) of table extension (EO) and/or records (96) table containing at least one record of single file fragments and records of records table of table extension and/or a set of records of single file fragments, and the number of tables of further table extensions is not limited.



(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only
- of inventorship (Rule 4.17(iv)) for US only

Published:

- without international search report and to be republished upon receipt of that report
- (48) Date of publication of this corrected version:

3 June 2004

(15) Information about Correction: see PCT Gazette No. 23/2004 of 3 June 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.